

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number  
**WO 03/032029 A1**

(51) International Patent Classification<sup>7</sup>:  
H04N 9/31

G02B 5/30,

Stephen, C.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB02/03736

(74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date:  
11 September 2002 (11.09.2002)

(81) Designated States (*national*): CN, JP, KR.

(25) Filing Language: English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR).

(26) Publication Language: English

(30) Priority Data:  
01203815.4 9 October 2001 (09.10.2001) EP

Published:


— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors: DE VAAN, Adrianus, J., S., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MCCLAIN,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: OPTICAL DEVICES

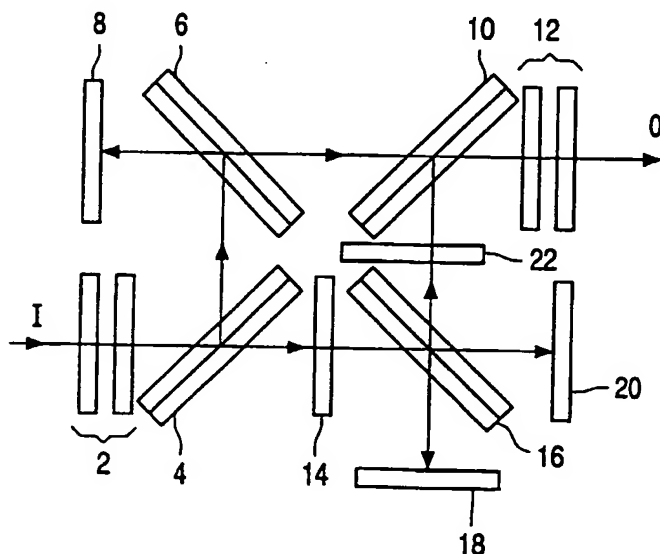

(57) Abstract: An optical device for processing radiation, said device comprising a polarising beam splitter (4, 6, 10, 16) and a plurality of radiation processing parts (8, 18, 20) arranged to process the characteristics of different radiation components separately, wherein the polarising beam splitter comprises a wire grid polariser having first and second sides, a first transparent plate arranged adjacent one side of the polariser and a second transparent plate arranged adjacent the other side. Each of said first and second plates have an optical thickness profile which is substantially equal.

WO 03/032029 A1

## Optical devices

## FIELD OF THE INVENTION

This invention relates to optical devices for processing radiation, in particular but not exclusively colour projection devices, and to polarising beam splitters.

## 5 BACKGROUND

Colour projection systems are known in the prior art. Consumer products, such as rear projection televisions, rear projection monitors and front projection systems are proposed in which liquid crystal on silicon (LCOS) micro displays are used. Several optical architectures exist for use with three LCOS panels, one each for red, green and blue.

10 Achieving high contrast in a compact and cost-effective system remains problematic.

One existing architecture, referred to as the Color Quad™ architecture, proposed by Color Link uses four polarising beam splitter cubes in a square arrangement together with selectively polarising retardance plates such as the Color Select™ plates produced by the same company, to perform the colour splitting and polarisation functions necessary in an LCOS projection system. The system performs with high contrast, but the  
15 polarising beam splitter cubes are relatively expensive and require skew angle compensating retarders next to each LCOS panel in order to achieve high contrast. Also, the polarising beam splitter cubes are subject to strain birefringence, due to mounting or temperature induced stresses, further decreasing the contrast and the contrast uniformity. A broadband  
20 wire grid polariser for the visible spectrum is described in Patent No. US-A-611103, assigned to Moxtek. The company Moxtek produces wire grid polarisers which may be used as beam splitters. A paper, "An Improved Polarising Beam Splitter LCOS Projection Display Based on Wire-Grid Polarisers", Arnold and Gardner, SID01 Digest, 2001, describes the use of wire  
25 grid polarisers for a projection lens design architecture. In the paper, it is proposed to use a wire grid polariser and describes astigmatism produced by a tilted plate in a non-collimated beam as a problem in such as system.

It is an object of the invention to provide improvements in relation to these known devices.

## SUMMARY OF THE INVENTION

In accordance with a first aspect of the invention, there is provided an optical device for processing radiation, said device comprising a polarising beam splitter and a plurality of radiation processing parts arranged to process the characteristics of different radiation components separately, wherein the polarising beam splitter comprises a selectively reflective polariser having first and second sides, a first transparent plate arranged adjacent one side of the polariser and a second transparent plate arranged adjacent the other side, wherein substantially all of the polarising effect of the beam splitter is provided by the selectively reflective polariser.

10 This aspect of the invention provides an arrangement wherein the functionality of a plate polariser, such as a wire grid polariser, can be used whilst the optical path lengths and astigmatism, if any, produced in the device may be made substantially equal for each different optical path traversing the beam splitter. Preferably, the optical thickness profiles, i.e. the cross sections adjusted in accordance with any difference in refractive index between  
15 the two elements, are substantially the same. The components may then be combined, or otherwise processed in a similar manner without the components carrying substantially different systematic errors, which can prove to be extremely difficult subsequently to correct.

Furthermore, by placing transparent elements on each side of the selectively reflective polariser, and having the plates substantially planar, preferably of equal thickness,  
20 stress birefringence effects due to mechanical and thermally induced stress can be reduced significantly.

In accordance with a further aspect of the invention, there is provided a polarising beam splitter comprising a planar reflective polariser having first and second substantially planar sides, a first transparent plate arranged adjacent one side of the polariser  
25 and a second transparent plate arranged adjacent the other side, wherein substantially all of the polarising effect of the beam splitter is provided by the planar reflective polariser. Preferably, each of said first and second plates are of substantially equal thickness.

This aspect provides a beam splitter for use in the arrangement of the first aspect of the invention.

30 In accordance with a further aspect of the invention there is provided an optical device for processing radiation, said device comprising a polarising beam splitter and a plurality of radiation processing parts arranged to process the characteristics of different radiation components separately, wherein the polarising beam splitter comprises a wire grid polariser having first and second sides, a first transparent element arranged adjacent said first

side and in contact with the wire grid polariser over substantially all said first side, and a second transparent element adjacent said second side and in contact with the wire grid polariser over substantially all said second side.

5 This aspect of the invention provides a device using a wire grid polariser as a polarising beam splitter, wherein the flatness of the wire grid polariser surfaces may be consistently obtained, even during mechanically and thermally induced stressing of one or more of the two elements and the wire grid polariser itself.

Further features and advantages of the different aspects of the invention will be apparent from the following detailed description of preferred embodiments of the  
10 invention, made with reference to the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

The Figure is a schematic plan diagram of a colour video projection apparatus in accordance with an embodiment of the invention.

15

## DETAILED DESCRIPTION

The Figure shows a colour video projector modulation device in accordance with an embodiment of the invention. A colour video projector in accordance with this embodiment of the invention includes the modulation device along with a radiation emitter,  
20 not shown, emitting substantially white light in the form of an input beam (I) and further optical components, not shown, typically including an output lens for projecting the output beam towards a projector screen.

The modulation device includes a green/magenta retardation plate 2, including birefringent layers for selectively polarising the input beam, which is typically plain  
25 polarised, to produce a first component, which consists substantially exclusively of wavelength in the green part of the spectrum and has a first polarisation, and a second component, which consists substantially fully of radiation in the magenta part of the spectrum, which is orthogonally polarised. A first polarising beam splitter 4 splits the different components by reflecting the green component towards a second polarising beam  
30 splitter 6, and to transmit the second component. The second polarising beam splitter 6 reflects substantially all of the incident radiation towards a liquid crystal on silicon (LCOS) radiation modulating panel 8, which modulates the incident radiation beam in accordance with a green video signal applied to the liquid crystal matrix. Accompanying the modulation, the polarisation of the beam is rotated through 90° and the reflected beam is transmitted

through the polarising beam splitter 6 towards a third polarising beam splitter 10, which transmits the green component towards a green/magenta retardation plate 12, similar to green/magenta retardation plate 2, to produce part of the output beam (O). The magenta component transmitted by the first beam splitter 4 is transmitted towards a red/blue retardation plate 14 which selectively polarises the green and blue parts of the incident light such that red and blue components are produced with orthogonal polarisations. A fourth polarising beam splitter 16 then selectively reflects the different components, reflecting the red component towards a second modulating LCOS panel 18, which modulates the incident beam in accordance with a red video signal applied to the liquid crystal matrix, reflects the incident beam and rotates its polarisation. The reflected beam is then transmitted through the fourth polarising beam splitter 16 towards a second red/blue retardation plate 22, similar to red/blue retardation plate 14, and onto third polarising beam splitter 10, where the red component of the beam is reflected towards the retardation plate 12 to form part of the output beam (O).

The blue component of the beam is transmitted through polarising beam splitter 16 towards a third LCOS light modulating panel, which modulates the light in accordance with a blue video signal applied to liquid crystal matrix thereof, and reflects the light along with a rotation of its polarisation by  $90^\circ$  towards the fourth polarising beam splitter 16, where the blue component is reflected towards red/blue retardation plate 22, which transmits the blue component towards the third polarising beam splitter 10, which reflects the blue components towards the green/magenta retardation plate 12, forming the remainder of the output beam (O).

Each of the polarising beam splitters 4, 10, 16 are constructed in accordance with an embodiment of the present invention. In this embodiment, a polarising beam splitter is formed of a plate polariser, in the form of a wire grid polariser, sandwiched between two substantially identical transparent plates mounted parallel to one another. Each transparent plate may be formed of a substance such as glass. The wire grid polariser may for example be formed on one of the glass plates, which forms a substrate thereof, and the second glass plate may then be adhered, over its whole surface or around its edges, to the first glass plate carrying the wire grid polariser. Where the adhesive is used over the whole surface between the two plates, no air interfaces are included between the two plates. Otherwise, if the two plates are adhered round the surfaces, the central area, which includes the wire grid polariser may include an air interface. In any case, each plate is in contact with the wire grid polariser over substantially all of its respective two sides. The two plates preferably carry anti-

reflection coatings on one or both of their main surfaces in order to minimise transmission loss on entry into, exit from, and within, the polarising beam splitter.

The transparent plates are selected to be relatively thin, preferably less than 5mm. The plates are preferably chosen to be a thickness of between 0.5 and 2.5mm, typically 1mm or 2mm. By the use of polarising beam splitters in accordance with the present invention is that, by selecting such thin plates the optical path length inside the transparent material of the polarising beam splitter can be reduced significantly, so that astigmatism and stress birefringence effects become smaller, resulting in a system of improved performance, in particular providing higher contrast, especially in high lumen systems.

10 The modulation device also preferably includes an optical component configuration (not shown) for compensating the astigmatism in the output beam (O) created by the transparent plates. The configuration may include an axially offset spherical lens element in the output lens, and/or a plate, of an optical thickness equal to that of the combined optical path length in the transparent plates, arranged in the optical path at an oblique angle, to provide the opposite amount of astigmatism as that introduced by the transparent plates.

It should be noted that the use of wire grid polarisers provides the advantage that skew angle compensating retarders are not required at any of the LCOS panels.

20 Whilst in the embodiment shown in the Figure, each of the four polarising beam splitters are arranged in accordance with an embodiment of the invention, the modulating device may include one or more other known types of polarising beam splitters in an alternative arrangement. For example, the first polarising beam splitter 4 and/or the third polarising beam splitter 10 may be replaced by a conventional cube-type polarising beam splitter. The second polarising beam splitter and the fourth polarising beam splitters may each be replaced with a conventional cube-type polarising beam splitter. However, if such a beam splitter is to be used, it may be necessary to use one or more skew angle compensating retarders in front of each LCOS panel receiving radiation having passed through the cube-type beam splitter. Furthermore, the third polarising beam splitter 10 may be replaced by a dichroic beam splitter capable of transmitting green light components and reflecting blue and red light components.

30 In each of these alternative embodiments, it will be appreciated that the use of the polarising beam splitter in accordance with this embodiment of the invention ensures that the optical path length and astigmatisms produced for the different components handled by each polarising beam splitter are equalised. However, not all four beam splitters need to

include plane- symmetrical transparent plates to each side of the polarising plate. For example, if the rear plate of the first beam splitter 4 is arranged to be non-planar, such asymmetry between the front and rear plates may be compensated for by introducing a similar non-planarity in the rear plate of the second beam splitter 6; in this case all optical components in corresponding parts of the respective beams traverse the same optical path lengths and undergo the same degree of astigmatism when combined to form the output beam. This is because all components traverse the plates in question only once, more particularly the same number of times. In the case of the fourth beam splitter, such asymmetry could not be compensated in a similar manner, since whilst the red beam traverses the rear plate only once, the blue beam traverses it twice, and the beams are combined inside the beam splitter. However, a small degree of asymmetry may be accepted, depending on the quality of image desired. Indeed, a small degree of asymmetry may be beneficial. In an alternative arrangement, the two plates may be mounted in a non-parallel arrangement, with one plate, acting as a substrate for the wire grid polariser, arranged at an orientation of  $45^\circ$  to the optical axis, and the other, separate, plate arranged such that its outer surface is arranged at a small angle, say less than  $10^\circ$  and more preferably less than  $5^\circ$ , thereto. With this arrangement it is possible to increase contrast in the output beam by deflecting the first surface reflection out of the main optical beam path. A similar effect could be achieved by introducing a small degree of tapering in the cross section of at least one of the plates, such that its outer surface is angularly offset by a similar small angle from  $45^\circ$  to the optical axis, whilst the wire grid polariser remains arranged at the  $45^\circ$  orientation.

In the arrangement described, a first plate is arranged adjacent and in contact with the wire grid polariser over substantially all one side, and a second transparent plate is arranged adjacent and in contact with the wire grid polariser over substantially all its other side. The effect is to provide a consistent and lasting flatness to the polariser surfaces. This effect is particularly beneficial in relation to third beam splitter 10 and the fourth beam splitter 16; these both reflect radiation after it has been imaged at an LCOS panel, and therefore flatness of these reflective surfaces is of particular importance.

Whilst it is preferred that each of the two transparent plates is planar, a degree of non-planarity may be provided in one or each of the plates. In particular, the outer surface(s) of the plate(s) may not be precisely parallel to a central plane of the plate. The non-planarity may take the form of an angular orientation, as described above, and/or a lens-shaping of the surface(s). The plates preferably still remain substantially planar, with a

thickness variation across the plate being limited to less than a tenth of the width of the plate, in order to achieve the effect of increasing contrast in the output beam.

Whilst it is preferred that the two transparent plates are substantially equal in thickness, or average thickness in the case of non-planarity, a substantial different in thickness, say 100%, can be employed if for example different further, compensating, optical elements are placed in the individual component parts of the radiation beam. However, with similar optical components in each of the optical paths of the radiation beam, it is preferred that each of the plates is substantially equal in thickness, that is to say less than 10% difference, more preferably less than 5%, being present between the thicknesses of the plates.

In the above embodiments, the polarising effect of the polarising beam splitter is provided solely by the wire grid polariser itself. That is to say, the plates to each side of the polariser have no polarising effect themselves. The plates may however have some polarising effect, if desired. However, preferably substantially all of the polarising effect of the beam splitter, that is to say at least 90% of the polarising effect, is provided by the polariser, in order to define an effective plane in which the large majority of the reflections provided by the beam splitter occur, thereby attaining improved contrast in the system.

The above embodiments are to be understood as illustrative examples of the invention. Further embodiments of the invention are envisaged. For example, an arrangement similar to that shown may be used in a radiation processing device for a colour video camera, wherein the radiation modulators are replaced by radiation detectors such as charge coupled devices (CCDs). It is to be understood that any feature described in relation to one embodiment may also be used in other of the embodiments. Furthermore, equivalents and modifications not described above may also be employed without departing from the scope of the invention, which is defined in the accompanying claims.



## CLAIMS:

1. An optical device for processing radiation, said device comprising a polarising beam splitter and a plurality of radiation processing parts arranged to process the characteristics of different radiation components separately, wherein the polarising beam splitter comprises a selectively reflective polariser having first and second sides, a first transparent plate arranged adjacent one side of the polariser and a second transparent plate arranged adjacent the other side, wherein substantially all of the polarising effect of the beam splitter is provided by the selectively reflective polariser.
2. An optical device according to claim 1, wherein each of said first and second plates are substantially planar.
3. An optical device according to claim 1 or 2, wherein said first and second plates have an optical thickness profile which is substantially equal.
4. An optical device according to any preceding claim, wherein each of said plates is manufactured of substantially the same material.
5. An optical device according to any preceding claim, wherein said selectively reflective polariser comprises a wire grid polariser.
6. An optical device according to any preceding claim, wherein said beam splitter is arranged to receive an incident beam at an angle of incidence substantially equal to 45°.
7. An optical device according to any preceding claim, wherein said polarising beam splitter is arranged to receive a first component beam, to reflect at least a portion of the first component beam towards a first processing part and to transmit a majority of the reflected beam when reflected from the first processing part.

8. An optical device according to any preceding claim, wherein said polarising beam splitter is arranged to receive an input beam and to split the input beam into different components beams.
- 5 9. An optical device according to any of claims 1 to 6, wherein said polarising beam splitter is arranged to receive different component beams and to combine the component beams to form an output beam.
- 10 10. An optical device according to any preceding claim, wherein said first and second elements exhibit an angle of difference in the arrangement of their outer surfaces.
11. An optical device according to any preceding claim, wherein said device comprises a second polarising beam splitter comprising a second selectively reflective polariser having first and second sides, a third transparent plate arranged adjacent one side of  
15 the second polariser and a fourth transparent plate arranged adjacent the other side, wherein substantially all of the polarising effect of the second beam splitter is provided by the second selectively reflective polariser.
12. An optical device according to claim 11, wherein each of said first, second,  
20 third and fourth plates have an optical thickness profile which is substantially equal.
13. An optical device according to claim 7 and 11 or 7 and 12, wherein said second polarising beam splitter is arranged to receive a second component beam, to reflect at least a portion of the second component beam towards a second processing part and to  
25 transmit a majority of the reflected beam when received in reflection from the second processing part.
14. An optical device according to claim 8 and 11 or 8 and 12, wherein said second polarising beam splitter is arranged to receive different component beams and to  
30 combine the component beams to form an output beam.
15. An optical device according to any of claims 11 to 14, further comprising third and fourth beam splitters, each said first, second, third and fourth beam splitters being

arranged at substantially 45° to the optical path of the beams being processed by the device, and at substantially 90° intervals with respect to each adjacent beam splitter.

16. An optical device according to any preceding claim, wherein said radiation  
5 processing parts comprise liquid crystal on silicon (LCOS) radiation modulating panels.

17. An optical device according to any preceding claim, further comprising an  
optical component configuration for compensating aberrations caused by said transparent  
plates.

10


18. A polarising beam splitter comprising a planar reflective polariser having first  
and second substantially planar sides, a first transparent plate arranged adjacent one side of  
the polariser and a second transparent plate arranged adjacent the other side, wherein  
substantially all of the polarising effect of the beam splitter is provided by the planar  
15 reflective polariser.

19. A polarising beam splitter according to claim 18, wherein each of said first  
and second plates are substantially planar and of substantially equal thickness.

20. 20. A polarising beam splitter according to claim 18 or 19, wherein said polariser  
is a wire grid polariser.

21. An optical device for processing radiation, said device comprising a polarising  
beam splitter and a plurality of radiation processing parts arranged to process the  
25 characteristics of different radiation components separately, wherein the polarising beam  
splitter comprises a wire grid polariser having first and second sides, a first transparent  
element arranged adjacent said first side and in contact with the wire grid polariser over  
substantially all said first side, and a second transparent element adjacent said second side  
and in contact with the wire grid polariser over substantially all said second side.

1/1

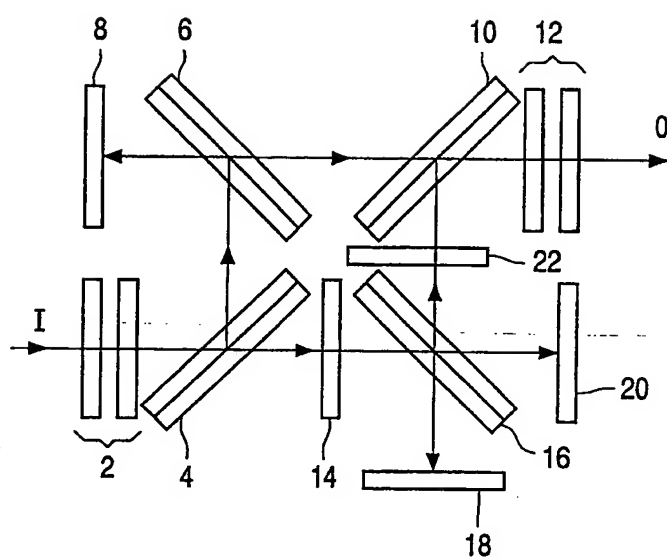

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 02/03736

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 G02B5/30 H04N9/31

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 G02B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 208 463 B1 (GUNTHER JOHN ET AL) 27 March 2001 (2001-03-27) column 14, line 47 - line 65 figures	1,2,5,8, 18,20,21
A	ARNOLD STEPHEN ET AL.: "AN IMPROVED POLARIZING BEAMSPLITTER LCOS PROJECTION DISPLAY BASED ON WIRE-GRID POLARIZERS" SID INTERNATIONAL SYMPOSIUM DIGEST OF TECHNICAL PAPERS, June 2001 (2001-06), pages 1282-1285, XP008014615 cited in the application the whole document	1-21
A	WO 01 51964 A (MOXTEK) 19 July 2001 (2001-07-19) abstract; figures	1-21
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*G\* document member of the same patent family

Date of the actual completion of the international search

4 March 2003

Date of mailing of the international search report

12/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

Ward, S

## INTERNATIONAL SEARCH REPORT

In tional Application No

PCT/IB 02/03736

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 991 075 A (KATSURAGAWA TADAO ET AL) 23 November 1999 (1999-11-23) abstract; figures ----	1-21
A	US 6 122 103 A (PERKINS RAYMOND T ET AL) 19 September 2000 (2000-09-19) cited in the application abstract; figures ----	1-21
A	EP 0 721 116 A (SONY CORP) 10 July 1996 (1996-07-10) abstract; figure 3 ----	1-21
A	US 5 946 098 A (HERZINGER CRAIG M ET AL) 31 August 1999 (1999-08-31) abstract; figures ----	1-21
A	WO 00 70386 A (3M INNOVATIVE PROPERTIES CO) 23 November 2000 (2000-11-23) page 14, line 22 - line 23; figure 2 ----	1-21
A	WO 01 55778 A (ITO YOSHITAKA ;SAKATA HIDEFUMI (JP); SEIKO EPSON CORP (JP)) 2 August 2001 (2001-08-02) abstract; figures ----	1-21
A	US 6 251 297 B1 (KOMURO EIJU ET AL) 26 June 2001 (2001-06-26) abstract; figures ----	1-21
A	US 6 243 199 B1 (PERKINS RAYMOND T ET AL) 5 June 2001 (2001-06-05) abstract; figures -----	1-21

## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 02/03736

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6208463	B1	27-03-2001	AU 4071299 A CN 1307689 T EP 1086390 A1 JP 2002514781 T NO 20005734 A WO 9959008 A1	29-11-1999 08-08-2001 28-03-2001 21-05-2002 03-01-2001 18-11-1999
WO 0151964	A	19-07-2001	US 6288840 B1 AU 2639101 A EP 1250614 A1 WO 0151964 A1	11-09-2001 24-07-2001 23-10-2002 19-07-2001
US 5991075	A	23-11-1999	JP 10213785 A	11-08-1998
US 6122103	A	19-09-2000	AU 5758300 A BR 0012529 A CN 1363048 T EP 1192486 A1 JP 2003502708 T WO 0079317 A1 US 6288840 B1	09-01-2001 23-07-2002 07-08-2002 03-04-2002 21-01-2003 28-12-2000 11-09-2001
EP 0721116	A	10-07-1996	JP 8184711 A CN 1157931 A EP 0721116 A1 SG 45132 A1 US 5748368 A	16-07-1996 27-08-1997 10-07-1996 16-01-1998 05-05-1998
US 5946098	A	31-08-1999	US 5963325 A US 6084675 A US 6456376 B1	05-10-1999 04-07-2000 24-09-2002
WO 0070386	A	23-11-2000	US 6486997 B1 EP 1181617 A1 JP 2002544561 T TW 459146 B WO 0070386 A1 US 2002109795 A1	26-11-2002 27-02-2002 24-12-2002 11-10-2001 23-11-2000 15-08-2002
WO 0155778	A	02-08-2001	CN 1363052 T EP 1180711 A1 WO 0155778 A1 JP 2001281615 A	07-08-2002 20-02-2002 02-08-2001 10-10-2001
US 6251297	B1	26-06-2001	JP 11183727 A	09-07-1999
US 6243199	B1	05-06-2001	AU 7475500 A CN 1378654 T EP 1212644 A1 WO 0118570 A1	10-04-2001 06-11-2002 12-06-2002 15-03-2001

**THIS PAGE BLANK (USPTO)**